

# MX1 Lite

## Inline Inkjet Printer



- ① 4.3-inch capactive touch screen
- ② Transmission interface can withstand 30kg pulling force

- ③ 600DPI high-resolution printing
- ④ Flexible user administration, 3-level available



Wood




Bottles



Polybags



Cosmetics

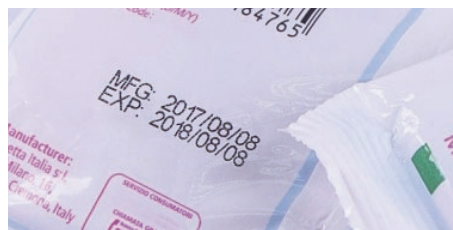

Food Packaging Bags















Paper Boxes

# Parameters

<b>Print Head:</b>	Thermal inkjet 2.5
<b>Operation System:</b>	Linux
<b>CPU:</b>	Dual core 1.2GHz
<b>Interface:</b>	USB
<b>Language:</b>	Chinese, English, Turkish, Arabic, Korean, Spanish, Russian, Portuguese, Italian
<b>Print Distance:</b>	Best quality with 2-5mm
<b>Print Resolution:</b>	600dpi Maximum
<b>Print Height:</b>	2-12.7mm
<b>Ink Type:</b>	Water-based/42ml, Solvent /42ml
<b>Print Content:</b>	Text, time, symbol, QR code, bar code, DM code, image, counting number, variable data
<b>Print Materials:</b>	Plastic, carton, stone, pipe, cable, metal, electronic, wood, glass, automotive parts
<b>Adapter:</b>	AC input 100-240V; DC output 12V or 16.8V/2A
<b>Operational Environment :</b>	Temperature 0-45°C (The best:20-30°C ) Humidity 40%-60%Rh

# Dimension & Accessories

Standard List			Optional Parts		
					
① Cardboard box	③ Controller	⑤ Power adapter		② Alarm light	
			① Stand bracket		③ High precision adjustment component
② Inline mounting bracket	④ Print head	⑥ Photocell sensor			
					
			④ Anti-shock mount	⑤ Spring-back holder	⑥ Encoder

